


Solar Chargers Offer Increased Wattage in a Similar Small Size Panel

SP-3, 3-Watt Solar Battery Charger Maintainer; SP-7, 7-Watt Solar Battery Charger Maintainer and the SP-12, 12-Watt Solar Battery Charger Maintainer

These solar chargers offer the same great features including a similar size solar footprint and patented Pulse Technology waveform as their predecessors with some notable improvements. The wattage output is now higher, making them more efficient. There are now two wires instead of three so the cable is not as thick, allowing for easier installation. In addition, the two quick connects can be used with our existing XC wiring accessories that we already offer - including extensions and lugs and clips.

- Telematic support to offset parasitic loads
- Prevents discharged batteries from sitting idle
- Removes sulfates from battery for improved performance
- Dramatically reduces jumpstarts
- Patented Pulse Technology extends battery life 3X
- Safe/easy plug and play installation
- 10 year limited warranty

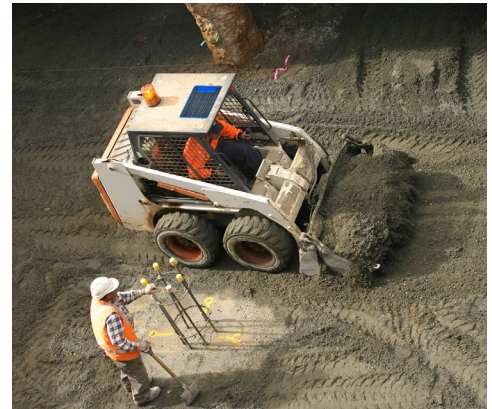

SP-3 3-Watt Solar Battery Charger Maintainer

The SP-3, 3-Watt 12V solar charger maintainer is 50% more powerful than its predecessor the popular SP-2, 2-Watt (735X302) model. By using higher efficiency solar cells, and a re-designed patented pulse charger, we have dramatically increased power output - using a similar solar panel size. This means that both charging and desulfating of 12V lead acid batteries will see a dramatic improvement! The new SP-3, 3-watt is a direct replacement for the discontinued SP-2, 2-watt charger maintainer. 10 year limited warranty.

[735X453](#) SP-3, 3-Watt 240-mA Solar Battery Charger/Maintainer/Desulfator

SP-3 Specifications	
Max Charge Current	240 mA
Output Voltage, Bulk Charge	16.5 V dc
Solar Panel Dimensions	4.7"L x 9.45"W x 0.25"H
Circuit Box Dimensions	3.4"L x 2.4"W x 1.5"H
Main Cable Length	17'
Lug Cable Length	3'



SP-7 7-Watt Solar Battery Charger Maintainer

The SP-7, 7-Watt 12V solar charger maintainer is 40% more powerful than its predecessor the popular SP-5, 5-Watt (735X305) model. By using higher efficiency solar cells, and a re-designed patented pulse charger, we have dramatically increased power output - using a similar solar panel size. This means that both charging and desulfating of 12V lead acid batteries will see a dramatic improvement! The new SP-7, 7-watt is a direct replacement for the discontinued SP-5, 5-watt charger maintainer. 10 year limited warranty.

[735X467](#) SP-7, 7-Watt 450-mA Solar Battery Charger/Maintainer/Desulfator

SP-7 Specifications	
Max Charge Current	450 mA
Output Voltage, Bulk Charge	16.5 V dc
Solar Panel Dimensions	10.25"L x 8.85"W x 0.25"H
Circuit Box Dimensions	3.4"L x 2.4"W x 1.5"H
Main Cable Length	17'
Lug Cable Length	3'



SP-12 12-Watt Solar Battery Charger Maintainer

The SP-12, 12-Watt 12V solar charger maintainer is 20% more powerful than its predecessor the popular SP-10, 10-Watt (735X310) model. By using higher efficiency solar cells, and a re-designed patented pulse charger, we have dramatically increased power output - with no change to the solar panel size. This means both the charging and desulfating of 12V lead acid batteries will see a dramatic improvement! The new SP-12, 12-watt is a direct replacement for the discontinued SP-10, 10-watt charger maintainer. 10 year limited warranty.

[735X468](#) SP-12, 12-Watt 750-mA Solar Battery Charger/Maintainer/Desulfator

SP-12 Specifications	
Max Charge Current	750 mA
Output Voltage, Bulk Charge	16.5 V dc
Solar Panel Dimensions	12.41"L x 9.85"W x 0.25"H
Circuit Box Dimensions	3.4"L x 2.4"W x 1.5"H
Main Cable Length	17'
Lug Cable Length	3'